


PET CAN TECH

Karta techniczna / Technical data sheet Puszka PET / CAN PET 16_OZ_standard

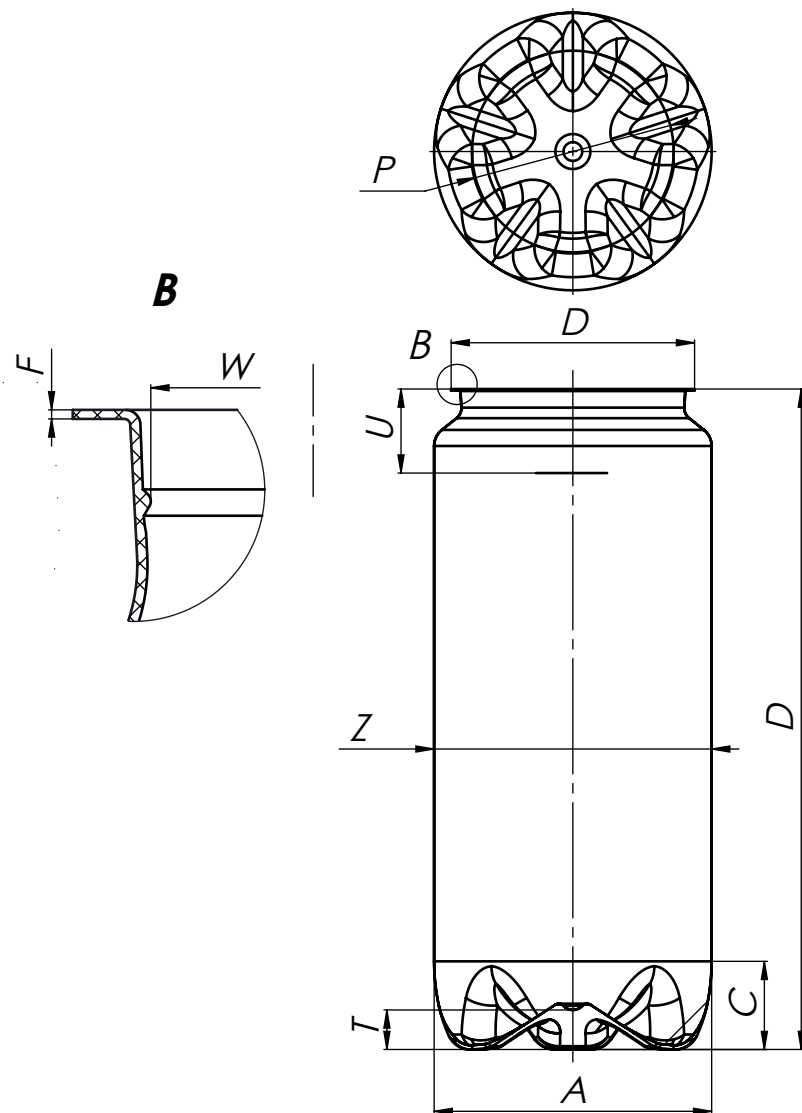

-	<i>Product</i>	<i>Can 16_OZ_standard</i>	
-	<i>Number</i>	<i>21828-2</i>	
-	<i>Closure type</i>	<i>202</i>	
-	<i>Volume</i>	<i>468 (ml)</i>	<i>15,8 (oz)</i>
<i>A</i>	<i>The outer diameter</i>	<i>66,5 ± 0,5 (mm)</i>	<i>2,618 ± 0,02 (in)</i>
<i>G</i>	<i>The height of empty cans</i>	<i>157,2 ± 0,5 (mm)</i>	<i>6,189 ± 0,02 (in)</i>
<i>Z</i>	<i>The diameter of the label</i>	<i>66,5 ± 0,5 (mm)</i>	<i>2,618 ± 0,02 (in)</i>
<i>D</i>	<i>The diameter of the flange</i>	<i>57,3 ± 0,5 (mm)</i>	<i>2,256 ± 0,02 (in)</i>
<i>F</i>	<i>The thickness of the flange</i>	<i>0,30 ± 0,05 (mm)</i>	<i>0,012 ± 0,002 (in)</i>
<i>P</i>	<i>The diameter of the base ring</i>	<i>48 ± 0,5 (mm)</i>	<i>1.890 ± 0,02 (in)</i>
<i>C</i>	<i>The height of the socket</i>	<i>21 ± 0,5 (mm)</i>	<i>0.827 ± 0,02 (in)</i>
<i>U</i>	<i>Fill level</i>	<i>20 ± 1 (mm)</i>	<i>0.787 ± 0,04 (in)</i>
<i>T</i>	<i>Push up height</i>	<i>9,4 ± 0,5 (mm)</i>	<i>0,370 ± 0,02 (in)</i>
<i>W</i>	<i>Inner flange diameter</i>	<i>52,3 max. (mm)</i>	<i>2,059 max. (in)</i>
-	<i>Resistance to axial pressure</i>	<i>67,3 (kg)</i>	<i>148,37 (lb)</i>
-	<i>Resistance to internal pressure</i>	<i>6,2 (bar)</i>	<i>89,92 (psi)</i>
-	<i>The nominal weight of the cans (no closure)</i>	<i>26,5 ± 0,8 (g)</i>	<i>0,0584 ± 0,0018 (lb)</i>
-	<i>Date / Rev A</i>	<i>2016-11-18</i>	

PET CAN TECH

Karta techniczna / Technical data sheet
Puszka PET / CAN PET 16_OZ_standard

