


# PET CAN TECH

## Karta techniczna / Technical data sheet Puszka PET / CAN PET 250\_slim

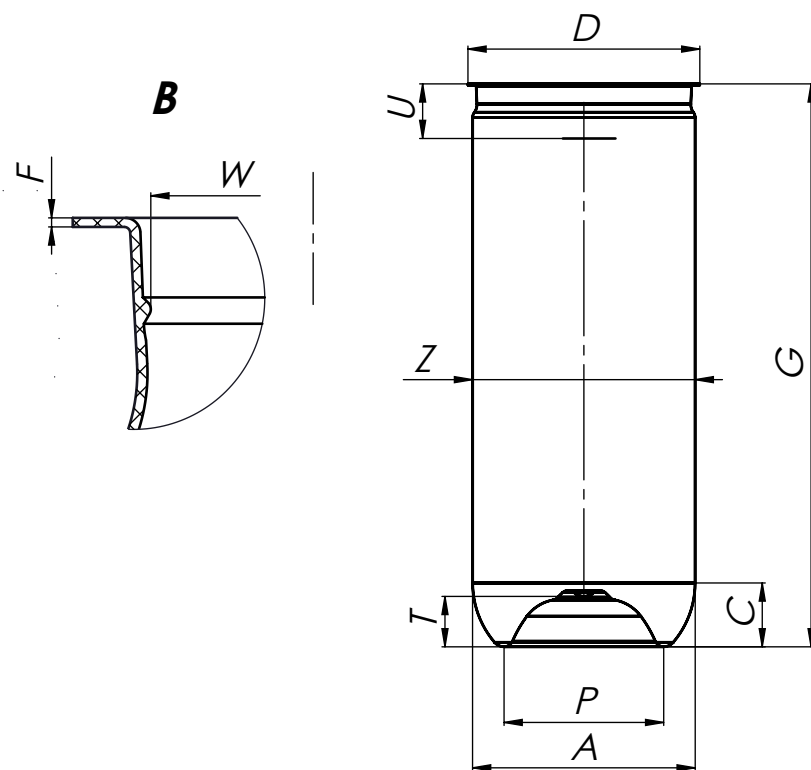

|   |                                                    |                         |                            |
|---|----------------------------------------------------|-------------------------|----------------------------|
| - | <i>Product</i>                                     | <i>Can 250_slim</i>     |                            |
| - | <i>Number</i>                                      | <i>25186-0</i>          |                            |
| - | <i>Closure type</i>                                | <i>200</i>              |                            |
| - | <i>Volume</i>                                      | <i>240 (ml)</i>         | <i>8,11 (oz)</i>           |
| A | <i>The outer diameter</i>                          | <i>53 ± 0,5 (mm)</i>    | <i>2,087 ± 0,02 (in)</i>   |
| G | <i>The height of empty cans</i>                    | <i>133 ± 0,5 (mm)</i>   | <i>5,236 ± 0,02 (in)</i>   |
| Z | <i>The diameter of the label</i>                   | <i>53 ± 0,5 (mm)</i>    | <i>2,087 ± 0,02 (in)</i>   |
| D | <i>The diameter of the flange</i>                  | <i>55,4 + 0,5 (mm)</i>  | <i>2,181 + 0,02 (in)</i>   |
| F | <i>The thickness of the flange</i>                 | <i>0,30 + 0,05 (mm)</i> | <i>0,012 + 0,002 (in)</i>  |
| P | <i>The diameter of the base ring</i>               | <i>38 ± 0,5 (mm)</i>    | <i>1,496 ± 0,02 (in)</i>   |
| C | <i>The height of the socket</i>                    | <i>15,2 ± 0,5 (mm)</i>  | <i>0,598 ± 0,02 (in)</i>   |
| U | <i>Fill level</i>                                  | <i>13 ± 1 (mm)</i>      | <i>0,512 ± 0,04 (in)</i>   |
| T | <i>Push up height</i>                              | <i>12 ± 0,5 (mm)</i>    | <i>0,472 ± 0,02 (in)</i>   |
| W | <i>Inner flange diameter</i>                       | <i>-- max. (mm)</i>     | <i>-- max. (in)</i>        |
| - | <i>Resistance to axial pressure</i>                | <i>67,3 (kg)</i>        | <i>148,37 (lb)</i>         |
| - | <i>Resistance to internal pressure</i>             | <i>6,2 (bar)</i>        | <i>89,92 (psi)</i>         |
| - | <i>The nominal weight of the cans (no closure)</i> | <i>20 ± 0,8 (g)</i>     | <i>0,044 ± 0,0018 (lb)</i> |
| - | <i>Date / Rev A</i>                                | <i>2016-11-18</i>       |                            |

## Karta techniczna / Technical data sheet Puszka PET / CAN PET 250\_slim

