


## Karta techniczna / Technical data sheet Puszka PET / CAN PET 500\_HF\_standard

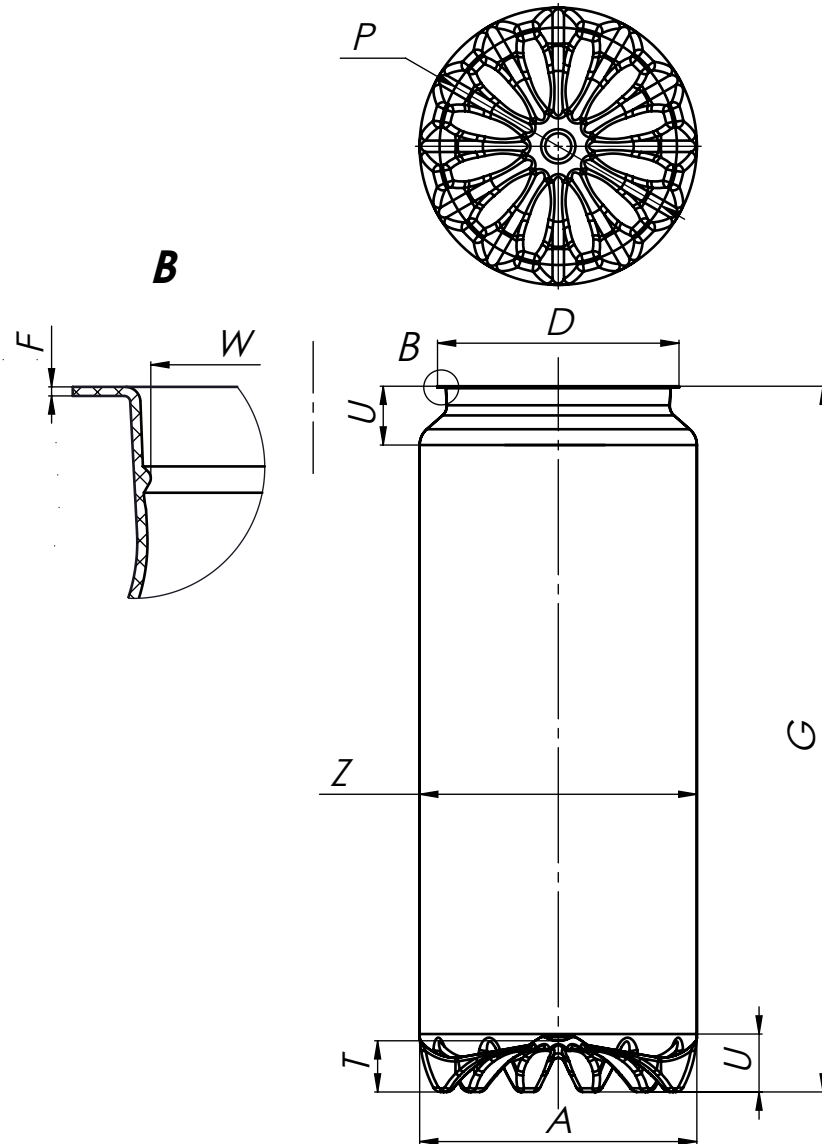

|   |                                                    |                            |                             |
|---|----------------------------------------------------|----------------------------|-----------------------------|
| - | <i>Product</i>                                     | <i>Can 500_HF_standard</i> |                             |
| - | <i>Number</i>                                      | <i>24587-1</i>             |                             |
| - | <i>Closure type</i>                                | <i>202</i>                 |                             |
| - | <i>Volume</i>                                      | <i>500 (ml)</i>            | <i>16,907 (oz)</i>          |
| A | <i>The outer diameter</i>                          | <i>66,5 ± 0,5 (mm)</i>     | <i>2,618 ± 0,02 (in)</i>    |
| G | <i>The height of empty cans</i>                    | <i>168 ± 0,5 (mm)</i>      | <i>6,614 ± 0,02 (in)</i>    |
| Z | <i>The diameter of the label</i>                   | <i>66,5 ± 0,5 (mm)</i>     | <i>2,618 ± 0,02 (in)</i>    |
| D | <i>The diameter of the flange</i>                  | <i>57,3 ± 0,5 (mm)</i>     | <i>2,256 ± 0,02 (in)</i>    |
| F | <i>The thickness of the flange</i>                 | <i>0,30 ± 0,05 (mm)</i>    | <i>0,012 ± 0,002 (in)</i>   |
| P | <i>The diameter of the base ring</i>               | <i>56,5 ± 0,5 (mm)</i>     | <i>2,224 ± 0,02 (in)</i>    |
| C | <i>The height of the socket</i>                    | <i>13,8 ± 0,5 (mm)</i>     | <i>0,543 ± 0,02 (in)</i>    |
| U | <i>Fill level</i>                                  | <i>14 ± 1 (mm)</i>         | <i>0,551 ± 0,04 (in)</i>    |
| T | <i>Push up height</i>                              | <i>12,2 ± 0,5 (mm)</i>     | <i>0,480 ± 0,02 (in)</i>    |
| W | <i>Inner flange diameter</i>                       | <i>52,3 max. (mm)</i>      | <i>2,059 max. (in)</i>      |
| - | <i>Resistance to axial pressure</i>                | <i>67,3 (kg)</i>           | <i>148,37 (lb)</i>          |
| - | <i>Resistance to internal pressure</i>             | <i>1,5 (bar)</i>           | <i>21,76 (psi)</i>          |
| - | <i>The nominal weight of the cans (no closure)</i> | <i>26,5 ± 0,8 (g)</i>      | <i>0,0584 ± 0,0018 (lb)</i> |
| - | <i>Date / Rev A</i>                                | <i>2016-11-18</i>          |                             |

# PET CAN TECH

Karta techniczna / Technical data sheet  
Puszka PET / CAN PET 500\_HF\_standard

